

## ★ Our Service Policy:

1. NFPA certified engineers provide design for all fire systems.
2. Installation and training at the customer's location.
3. Special product design with an appropriate solution.
4. Continuous technical support.
5. 2 years warranty.

## ★ Contact us

### ASENWARE GROUP

#### Shenzhen Asenware Test & Control Technology Co.,Ltd

D-26H, Shihong Building, No.63 Fanshen Road, Baoan District,  
Shenzhen, Guangdong, China -518101

#### Zhongshan Guta Fire Equipment Technology Co.,Ltd

4F, 10#, Xingye Rd., Huoju District, Zhongshan City, Guangdong.

#### ASENWARE LTD

6 Prospect Way, Royal Oak Industrial, Estate Daventry,  
Northamptonshire, England, NN118PL.



Only for Fire Safety



# 2024 CATALOG



Automatic Fire  
Extinguisher Control  
System  
AW-GEC2169

Website:  
[www.asenware.com](http://www.asenware.com)  
[www.asenwarefire.com](http://www.asenwarefire.com)

Email:  
[info@asenware.com](mailto:info@asenware.com)



YouTube



Website



TikTok



Addressable  
Fire Alarm System  
AW-FP100



Conventional  
Fire Alarm System  
AW-CFP2166



Voice Evacuation  
System



DEKRA  
Emergency  
Luminaire




Gas Suppression  
System



Water/Foam  
Suppression System

# CO2 Gas Extinguishing System


CO2 Gas Extinguishing System is a kind of intelligent automatic extinguishing system. In accordance with requirements for use in different places for application, the unit independent system and combined distribution system can be constituted and the way of total flooding extinguishing can be used in order to realize the extinguishing protection of single protection area and multi-protection area. CO2 gas automatic extinguishing system has advanced technology and high extinguishing efficiency and can be maintained easily. This system has 3 start-up modes including automatic operation, manual operation and mechanical emergency operation.

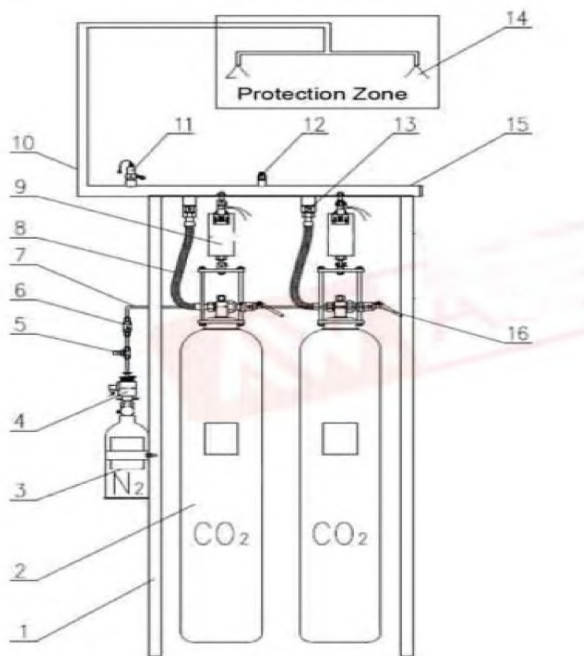

1. Bracket of storage bottle group of extinguishing agent
2. Storage bottle of extinguishing agent
3. Start-up bottle
4. Electromagnetic actuator of start-up bottle
5. Low-discharge and high-seal valve
6. Check valve of Start-up gas
7. Start-up pipe line
8. High-pressure hose
9. Weighing and leak detection device
10. Transmission pipeline of extinguishing agent
11. Pressure signal device
12. Safety valve
13. Check valve of extinguishing agent
14. Nozzle
15. Header pipe
16. Mechanical emergency start-up handle

This system is mainly suitable for the following fire situation


- Gas fire in the event that gas source can be cut off before extinguishment
- Liquid fire or fire due to fusible solids such as paraffin and asphalt
- Fire on solid surface and deep-seated fire of partial solids such as cotton, fabric, and paper
- Electrical fire

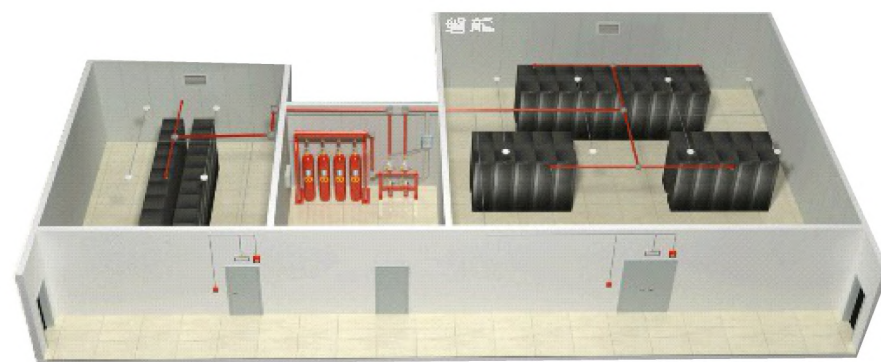

**AW ASENWARE**

Only for Fire Safety

# AUTOMATIC FIRE EXTINGUISHER CONTROL SYSTEM

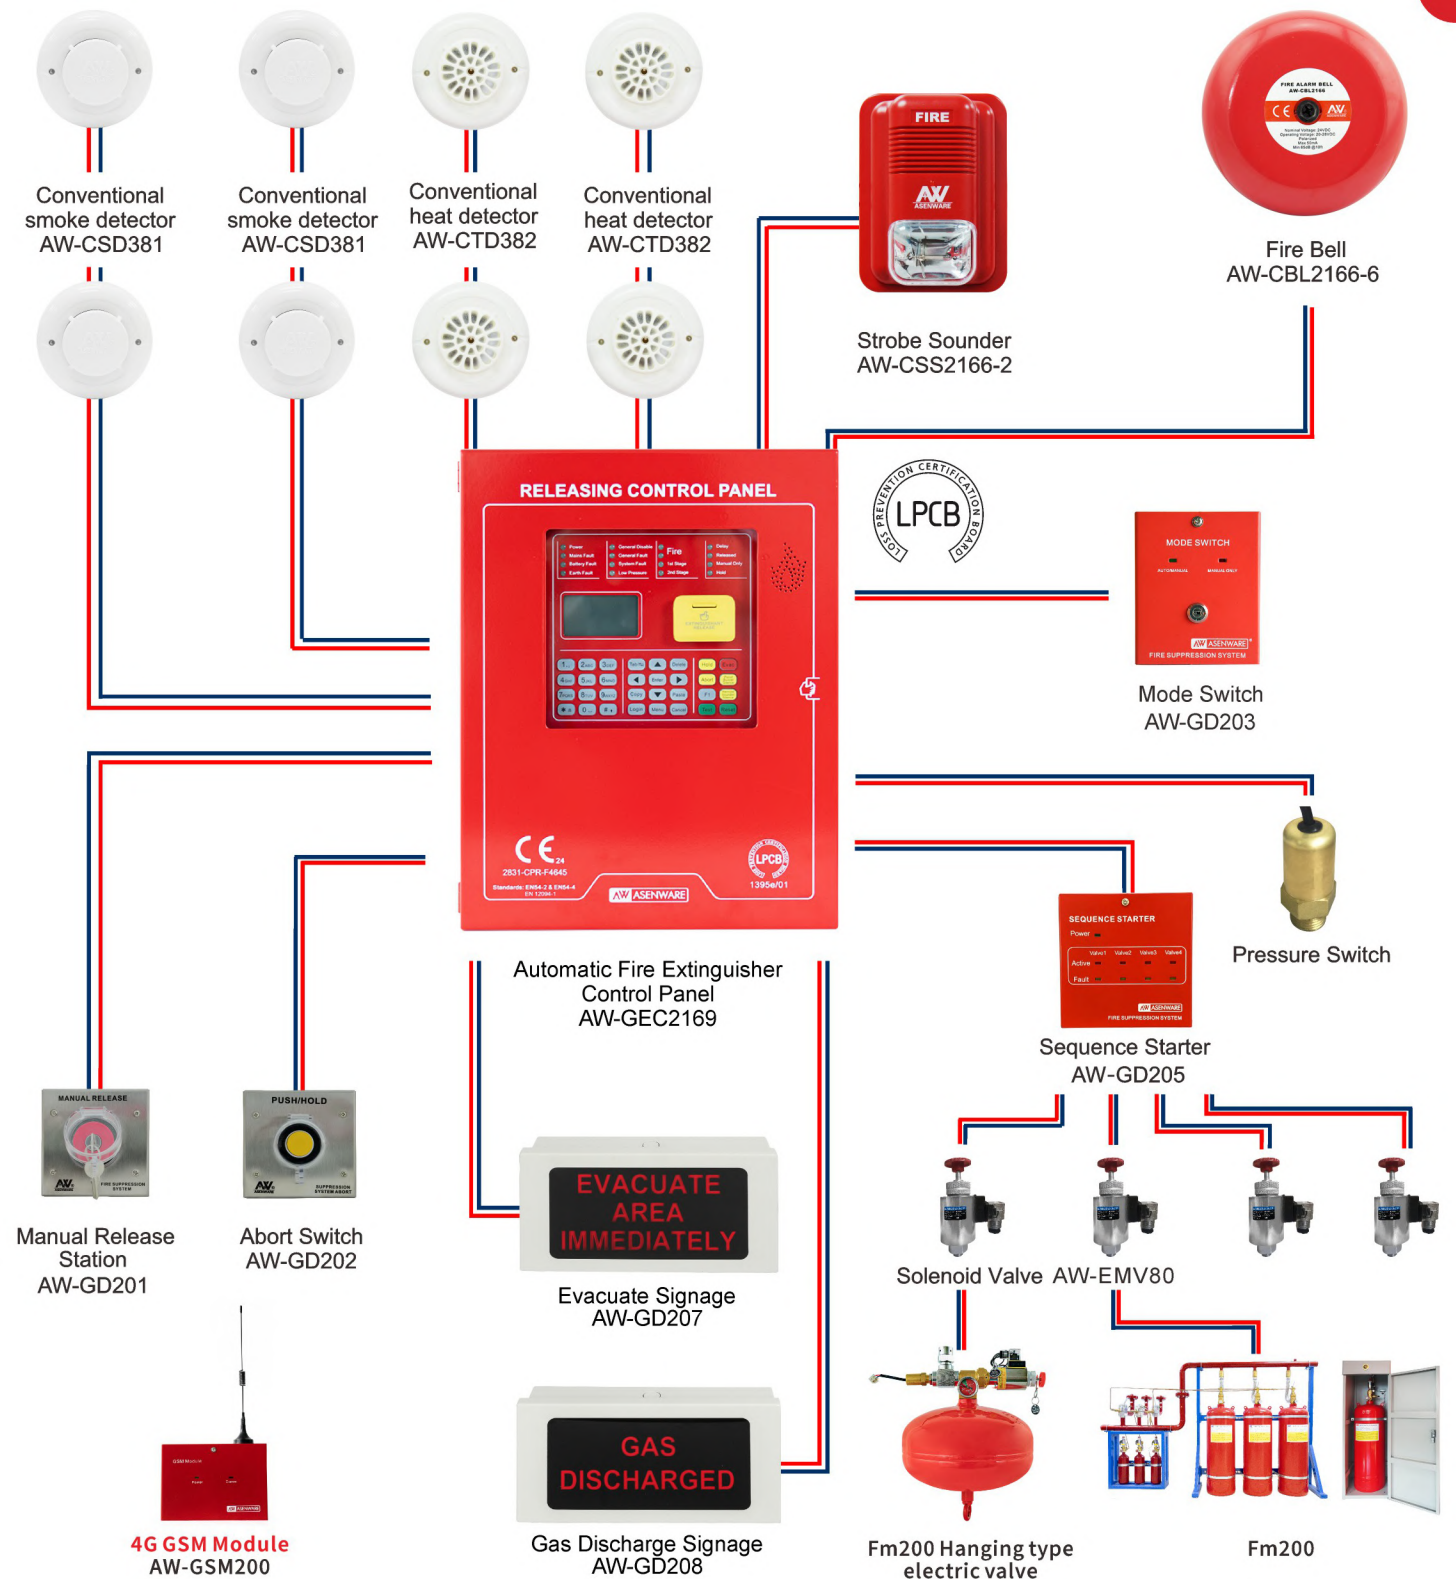



**Automatic Fire Extinguisher Control System  
AW-GEC2169**



**Fire Extinguishing System  
FM200/FK-5-1-12**



**CO2 Extinguishing System**



## AW-GEC2169 Automatic Fire Extinguisher Control Panel

AW-GEC2169 Automatic Fire Extinguisher Control Panel is designed in compliance with the requirements of European standards of EN54-2, EN54-4 and EN12094-1. This panel can be used in FM200, CO2, IG541, N1230 and other gas fire extinguishing systems.

| Features                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------|
| Alarm input: four alarm zones signal input, each zone can connect up to 20 detectors                                            |
| EM valve output: control the output of electromagnetic valve                                                                    |
| Panel outputs: circuit fault output / alarm output/ fire extinguishing signal output/24VDC output other parts working condition |
| Power output: resettable 24VDC output, 200mA current-limited protection                                                         |
| Automatic power shift: 220VAC power and standby battery power can be switched automatically                                     |
| GSM module (optional): GSM module allows users to receive alarm information by SMS                                              |



## FM-200/FK-5-1-12 Fire Extinguishing System


Asenware Clean Agent Fire Extinguishing Systems utilizes FM-200 FK-5-1-12 as extinguishing gas. Asenware gas extinguishing systems are available as Engineered and Pre-Engineered Systems (Cabinet System).



**Cabinet Type**



**Manifold Type**

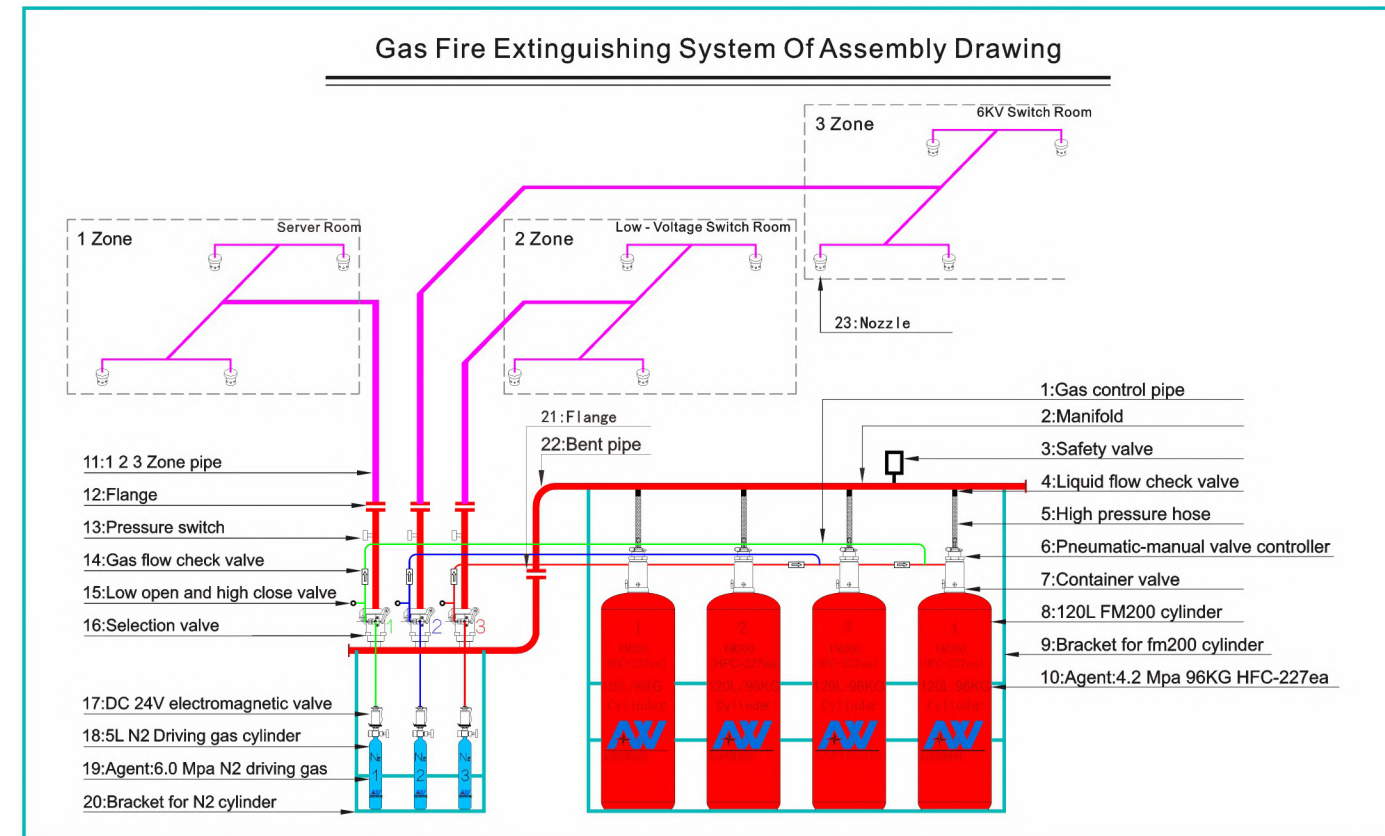

## Hanging Type Gas Extinguishing System

Different from network type of FM200, hanging type will be hung on the ceiling or attached on the wall.



**Electric Hanging Type**



**Fixed Temperature Hanging Type**

## Applications


Electronic computer room, a data processing center, telecommunications facilities, process control, expensive medical equipment, industrial equipment, library, museum and art gallery, clean room, anechoic chamber, emergency power facilities, flammable liquid storage area, etc.



## Fire Detection Tube Suppression System

| Features                                     |
|----------------------------------------------|
| Agent: FM 200/FK-5-1-12/CO2                  |
| Working Pressure: 15bar                      |
| Tube Melting Point Temperature: 160°C ± 10°C |



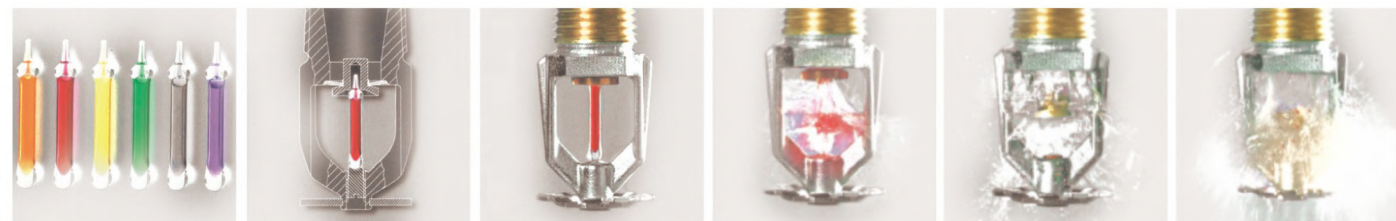


### Glass bulb type fire sprinkler

| Type                     | Pendent                                             | Upright | Sidewall |
|--------------------------|-----------------------------------------------------|---------|----------|
| Material                 | Brass or zinc alloy                                 |         |          |
| Normal diameter (mm)     | DN15 or DN20                                        |         |          |
| Connecting thread (inch) | R1/2" or R3/4"                                      |         |          |
| Response element         | Glass bulb                                          |         |          |
| Operating Temperature    | 57°C/68 °C /79 °C /93 °C /141 °C /181 °C            |         |          |
| Response type            | Standard response or Quick response                 |         |          |
| K factor                 | 80(5.6 @ US) or 115 (8.0 @ US)                      |         |          |
| Working pressure         | 0.1 MPa - 1.2 Mpa(1 bar - 12 bar)                   |         |          |
| Seal material            | Teflon (PTFE) plated metal O-ring, or rubber O-ring |         |          |



Only for Fire Safety

## FIRE SPRINKLER SYSTEM

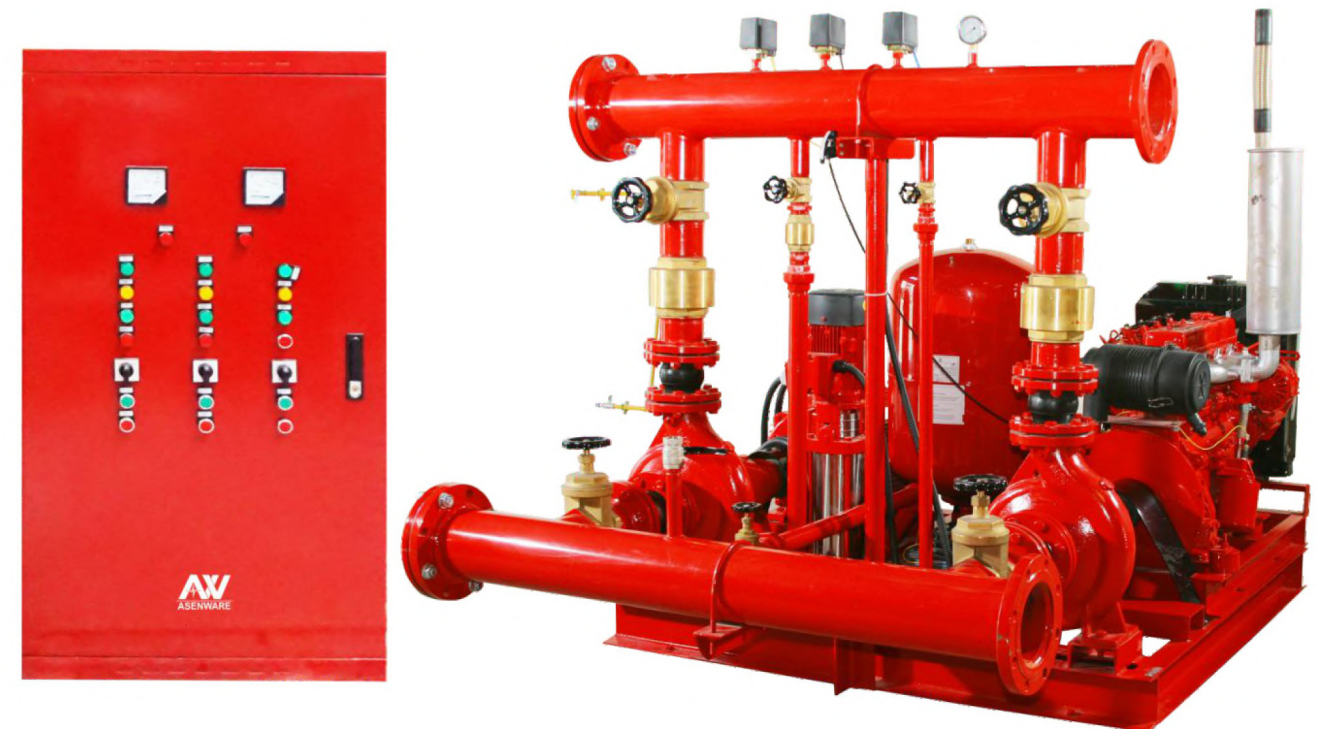

### Packaged Fire Pump System

Asenware Packaged Fire Pump System can provide the complete skid for Fire Pump service. Systems include the pump, driver, controller and jockey pump that all mounted on a common base. Controller is pre-wired to the drivers.

| Features                                                                      |
|-------------------------------------------------------------------------------|
| Full Assembly (Electric, Diesel and Jockey Pumps)                             |
| Common Base                                                                   |
| Suitable Suction and Discharge Piping                                         |
| Includes Check Valve, Isolation Valves and Pressure Gauges                    |
| Diesel Fuel Tank Mounting (optional ) and Battery Connection                  |
| Suitable Pressure Tank                                                        |
| Pre -Assembled Controller                                                     |
| Automatically run and stop jockey pump, electrical motor pump and diesel pump |
| Automatically charge the battery                                              |
| Special water flow path design for high efficiency                            |
| Full test with pressure gauge and flow meter at same time                     |



Fire Sprinkler System

The Fire Sprinkler System is an active fire protection measure, consisting of a water supply system, providing adequate pressure and flow rate to a water distribution piping system, onto which fire sprinklers are connected. Fire Sprinkler System is suitable for many types of buildings to install, not only factories, large commercial buildings, but also for small building and home. Fire Sprinkler Systems are extensively used worldwide with over 40 million sprinkler heads fitted each year. In buildings completely protected by Fire Sprinkler Systems, over 99% of fires were controlled by fire sprinklers alone.



Wet Alarm Valve

| Dimensions(mm)       |       |       |      |        |       |       |
|----------------------|-------|-------|------|--------|-------|-------|
| Nominal Diameter(mm) | OD    | A     | B    | ∅ d    | ∅ D   | F     |
| 80                   | 88.9  | 15.88 | 7.93 | 84.94  | 88.9  | 320.3 |
| 100                  | 114.3 | 15.88 | 9.53 | 110.08 | 114.3 | 382   |
| 150                  | 168.3 | 15.88 | 9.53 | 163.96 | 168.3 | 406.4 |
| 200                  | 219.1 | 19.05 | 9.53 | 214.4  | 219.1 | 446   |



Deluge Alarm Valve

| Nominal Diameter (mm) | Maximum working pressure (mpa) | Valve Height (mm) | Flange Od (mm) | Screw No& Bore Diameter (mm) | Install Dimension (mm) |
|-----------------------|--------------------------------|-------------------|----------------|------------------------------|------------------------|
| 50                    | 1.2                            | 165               | 125            | 8*18                         | 920*265*550            |
| 80                    | 1.2                            | 250               | 200            | 8*18                         | 950*275*575            |
| 100                   | 1.2                            | 250               | 215            | 8*18                         | 975*285*580            |
| 125                   | 1.2                            | 270               | 245            | 8*18                         | 995*325*580            |
| 150                   | 1.2                            | 270               | 280            | 8*18                         | 1020*340*580           |
| 200                   | 1.2                            | 300               | 335            | 12*12                        | 1020*395*595           |
| 250                   | 1.2                            | 450               | 400            | 12*26                        | 1185*460*598           |



Pre-action Alarm Valve

| Nominal Diameter (mm) | Nominal Working Pressure (MPa) | Body Height (mm) | Flange Outer Diameter (mm) | Water Pressure Reduced (MPa) | Drive Time(s) |
|-----------------------|--------------------------------|------------------|----------------------------|------------------------------|---------------|
| 100                   | 1.2~1.6                        | 250              | 220                        | <0.07                        | 15            |
| 150                   | 1.2~1.6                        | 270              | 285                        | <0.07                        | 15            |
| 200                   | 1.2~1.6                        | 370              | 340                        | <0.07                        | 15            |



2 Way Fire Hydrant

|                  |           |
|------------------|-----------|
| Outlet Size      | 2 x2.5"   |
| Inlet Size       | 4"        |
| Material         | Cast Iron |
| Working Pressure | 15 Bar    |



3 Way Fire Hydrant

|                  |                 |
|------------------|-----------------|
| Outlet Size      | 1 x4" & 2 x2.5" |
| Inlet Size       | 6"              |
| Material         | Cast Iron       |
| Working Pressure | 15 Bar          |



Flange Type Landing Valve

|                  |         |
|------------------|---------|
| Outlet Size      | 2.5"    |
| Inlet Size       | 2.5"    |
| Material         | Brass   |
| Working Pressure | 1.6 Mpa |



Thread Type Landing Valve

|                  |         |
|------------------|---------|
| Outlet Size      | 2.5"    |
| Inlet Size       | 2.5"    |
| Material         | Brass   |
| Working Pressure | 1.6 Mpa |



2 Way Breeching Inlet

|                  |           |
|------------------|-----------|
| Outlet Size      | 2x 2.5"   |
| Inlet Size       | 4"        |
| Material         | Cast Iron |
| Working Pressure | 10 Bar    |



4 Way Breeching Inlet

|                  |           |
|------------------|-----------|
| Outlet Size      | 4x 2.5"   |
| Inlet Size       | 6"        |
| Material         | Cast Iron |
| Working Pressure | 10 Bar    |



Gate Valve  
DN50-DN200

| Nominal Pressure(Mpa) | Boundary Dimension Unit:mm |     |     |     |
|-----------------------|----------------------------|-----|-----|-----|
|                       | DN                         | L   | HA  | HC  |
| 1.6MPa                | 50                         | 178 | 322 | 374 |
|                       | 65                         | 190 | 332 | 398 |
|                       | 80                         | 203 | 350 | 429 |
|                       | 100                        | 229 | 420 | 524 |
|                       | 125                        | 254 | 581 | 721 |
|                       | 150                        | 267 | 581 | 736 |
|                       | 200                        | 292 | 736 | 942 |



Y-Strainer  
DN65-DN200

| Nominal pressure(MPa) | DN  | L      | H      |
|-----------------------|-----|--------|--------|
|                       |     | flange | flange |
| 1.6MPa                | 65  | 225    | 135    |
|                       | 80  | 280    | 175    |
|                       | 100 | 300    | 195    |
|                       | 125 | 350    | 220    |
|                       | 150 | 390    | 240    |
|                       | 200 | 500    | 335    |



Butterfly Valve  
DN50-DN200

| Nominal Pressure(Mpa) | DN  | H1  | H2  | H3 | D1  | D2  | L1 |
|-----------------------|-----|-----|-----|----|-----|-----|----|
| 1.6MPa                | 50  | 70  | 130 | 68 | 120 | 95  | 43 |
|                       | 65  | 76  | 143 | 68 | 136 | 109 | 46 |
|                       | 80  | 86  | 155 | 68 | 160 | 124 | 46 |
|                       | 100 | 104 | 170 | 68 | 182 | 153 | 52 |
|                       | 125 | 118 | 190 | 68 | 215 | 179 | 56 |
|                       | 150 | 132 | 210 | 68 | 238 | 206 | 56 |
|                       | 200 | 167 | 243 | 85 | 295 | 264 | 60 |



Main Relief Valve  
DN 50-DN 200

| Nominal pressure(MPa) | Test pressure (MPa) |      | Applicable medium                         | Operating Humidity |
|-----------------------|---------------------|------|-------------------------------------------|--------------------|
|                       | Shell               | Seal |                                           |                    |
| 1.6MPa                | 2.4                 | 1.76 | Clean water and sewage without impurities | ≤80℃               |



Pressure Reducing Valve  
DN50-DN200

| Nominal Pressure(MPa) | Nominal Diameter DN (mm) | L   | PN16 |     | H   | H1  |
|-----------------------|--------------------------|-----|------|-----|-----|-----|
|                       |                          |     | D    | D1  |     |     |
| 1.6MPa                | 50                       | 240 | 160  | 125 | 265 | 210 |
|                       | 65                       | 240 | 180  | 145 | 310 | 215 |
|                       | 80                       | 292 | 195  | 160 | 350 | 245 |
|                       | 100                      | 325 | 215  | 180 | 460 | 305 |
|                       | 125                      | 340 | 245  | 210 | 520 | 365 |
|                       | 150                      | 403 | 280  | 240 | 570 | 415 |
|                       | 200                      | 435 | 335  | 295 | 695 | 510 |



Flow Indicator  
DN 25-DN 200

| Nominal pressure(MPa) | Installation    | Nominal diameter                                                 | Working pressure(Mpa) | Sensitivity L/min |
|-----------------------|-----------------|------------------------------------------------------------------|-----------------------|-------------------|
| 1.6MPa                | flange          | DN25<br>DN50<br>DN65<br>DN80<br>DN100<br>DN125<br>DN150<br>DN200 | 1.2                   | 15<Q<37.5         |
|                       | Saddle type     |                                                                  |                       |                   |
|                       | welded          |                                                                  |                       |                   |
|                       | Silk mouth type |                                                                  |                       |                   |



Sight Flow Glass type  
DN15-25



Sight Flow Thread type  
DN32-DN80



Sight Flow Flange type  
DN200



Flexible Coupling  
DN 50-DN 200



Check Valve  
DN 50-DN 200



Flow Meter  
DN 50-DN 200



Air Vent  
DN 50-DN 100



Seamless Galvanized Steel Pipe  
ASTM A53



Pipe Fittings  
Variable

ASTM A53 seamless steel pipe

Seamless steel pipe (SMLS) is formed by drawing a solid billet over a piercing rod to create the hollow shell, without welding or seam. It is suitable for bending and cutting. The advantage of seamless steel is the ability of withstanding higher pressure. ASTM A53 specification also covers seamless steel pipe. The pipe is intended for pressure and mechanical applications and is also acceptable for ordinary uses in oil, gas, steam, water and air lines. It is suitable for welding, bending and flanging.



- Standard: ASTM A53, Type S, Grade B
- Dimension: Sch40 /Sch80 as ASME B36.10M
- Application: Fire main pipe, fire pump pipe, Fire standpipe, fire sprinkler branch pipe ,
- Black and red seamless pipe is available

Outside Diameter and Thickness(American Standard ANSI B36.10 B36.19M)

| Nominal Pipe Size |     | Outside Diameter | Wall Thickness |       |       |       |        |      |       |       |        |       |       |        |        |        |        |       |
|-------------------|-----|------------------|----------------|-------|-------|-------|--------|------|-------|-------|--------|-------|-------|--------|--------|--------|--------|-------|
| NPS               | DN  |                  | SCH10s         | SCH10 | SCH20 | SCH30 | SCH40s | STD  | SCH40 | SCH60 | SCH80s | XS    | SCH80 | SCH100 | SCH120 | SCH140 | SCH160 | XXS   |
| 1/8               | 6   | 10.3             | 1.24           | --    | --    | --    | 1.73   | 1.73 | 1.73  | --    | 2.41   | 2.41  | 2.41  | --     | --     | --     | --     | --    |
| 1/4               | 8   | 13.7             | 1.65           | --    | --    | --    | 2.24   | 2.24 | 2.24  | --    | 3.02   | 3.02  | 3.02  | --     | --     | --     | --     | --    |
| 3/8               | 10  | 17.1             | 1.65           | --    | --    | --    | 2.31   | 2.31 | 2.31  | --    | 3.20   | 3.20  | 3.20  | --     | --     | --     | --     | --    |
| 1/2               | 15  | 21.3             | 2.11           | --    | --    | --    | 2.77   | 2.77 | 2.77  | --    | 3.73   | 3.73  | 3.73  | --     | --     | --     | 4.78   | 7.47  |
| 3/4               | 20  | 26.7             | 2.11           | --    | --    | --    | 2.87   | 2.87 | 2.87  | --    | 3.91   | 3.91  | 3.91  | --     | --     | --     | 5.56   | 7.82  |
| 1                 | 25  | 33.4             | 2.77           | --    | --    | --    | 3.38   | 3.38 | 3.38  | --    | 4.55   | 4.55  | 4.55  | --     | --     | --     | 6.35   | 9.09  |
| 1 1/4             | 32  | 42.2             | 2.77           | --    | --    | --    | 3.56   | 3.56 | 3.56  | --    | 4.85   | 4.85  | 4.85  | --     | --     | --     | 6.35   | 9.70  |
| 1 1/2             | 40  | 48.3             | 2.77           | --    | --    | --    | 3.68   | 3.68 | 3.68  | --    | 5.08   | 5.08  | 5.08  | --     | --     | --     | 7.14   | 10.15 |
| 2                 | 50  | 60.3             | 2.77           | --    | --    | --    | 3.91   | 3.91 | 3.91  | --    | 5.54   | 5.54  | 5.54  | --     | --     | --     | 8.74   | 11.07 |
| 2 1/2             | 65  | 73.0             | 3.05           | --    | --    | --    | 5.16   | 5.16 | 5.16  | --    | 7.01   | 7.01  | 7.01  | --     | --     | --     | 9.53   | 14.02 |
| 3                 | 80  | 88.9             | 3.05           | --    | --    | --    | 5.49   | 5.49 | 5.49  | --    | 7.62   | 7.62  | 7.62  | --     | --     | --     | 11.13  | 15.24 |
| 3 1/2             | 90  | 101.6            | 3.05           | --    | --    | --    | 5.74   | 5.74 | 5.74  | --    | 8.08   | 8.08  | 8.08  | --     | --     | --     | --     | --    |
| 4                 | 100 | 114.3            | 3.05           | --    | --    | --    | 6.02   | 6.02 | 6.02  | --    | 8.56   | 8.56  | 8.56  | --     | 11.13  | --     | 13.49  | 17.12 |
| 5                 | 125 | 141.3            | 3.40           | --    | --    | --    | 6.55   | 6.55 | 6.55  | --    | 9.53   | 9.53  | 9.53  | --     | 12.7   | --     | 15.88  | 19.05 |
| 6                 | 150 | 168.3            | 3.40           | --    | --    | --    | 7.11   | 7.11 | 7.11  | --    | 10.97  | 10.97 | 10.97 | --     | 14.27  | --     | 18.26  | 21.95 |
| 8                 | 200 | 219.1            | 3.76           | --    | 6.35  | 7.04  | 8.18   | 8.18 | 8.18  | 10.31 | 12.70  | 12.70 | 12.70 | 15.09  | 18.26  | 20.62  | 23.01  | 22.23 |
| 10                | 250 | 273.1            | 4.19           | --    | 6.35  | 7.8   | 9.27   | 9.27 | 9.27  | 12.70 | 12.70  | 12.70 | 15.09 | 18.26  | 21.44  | 25.4   | 28.58  | 25.4  |
| 12                | 300 | 323.9            | 4.57           | --    | 6.35  | 8.38  | 9.53   | 9.53 | 10.31 | 14.27 | 12.70  | 12.70 | 17.48 | 21.44  | 25.4   | 28.58  | 33.32  | 25.4  |
| 14                | 350 | 355.6            | 4.78           | 6.35  | 7.92  | 9.53  | --     | 9.53 | 11.13 | 15.09 | --     | 12.70 | 19.05 | 23.83  | 27.79  | 31.75  | 35.71  | --    |
| 16                | 400 | 406.4            | 4.78           | 6.35  | 7.92  | 9.53  | --     | 9.53 | 12.7  | 16.66 | --     | 12.70 | 21.44 | 26.19  | 30.96  | 36.53  | 40.49  | --    |
| 18                | 450 | 457.2            | 4.78           | 6.35  | 7.92  | 11.13 | --     | 9.53 | 14.27 | 19.05 | --     | 12.70 | 23.83 | 29.36  | 34.96  | 39.67  | 45.24  | --    |
| 20                | 500 | 508.0            | 5.54           | 6.35  | 9.53  | 12.7  | --     | 9.53 | 15.09 | 20.62 | --     | 12.70 | 26.19 | 32.54  | 38.1   | 44.45  | 50.01  | --    |
| 22                | 550 | 558.8            | 5.54           | 6.35  | 9.53  | 12.7  | --     | 9.53 | --    | 22.23 | --     | 12.70 | 28.58 | 34.93  | 41.28  | 47.63  | 53.98  | --    |
| 24                | 600 | 609.6            | 6.35           | 6.35  | 9.53  | 14.27 | --     | 9.53 | 17.48 | 24.61 | --     | 12.70 | 30.96 | 38.89  | 46.02  | 52.37  | 59.54  | --    |
| 26                | 650 | 660.4            | --             | 7.92  | 12.7  | --    | --     | 9.53 | --    | --    | --     | 12.70 | --    | --     | --     | --     | --     | --    |
| 28                | 700 | 711.2            | --             | 7.92  | 12.7  | 15.88 | --     | 9.53 | --    | --    | --     | 12.70 | --    | --     | --     | --     | --     | --    |

A53 Chemical components

| Standard | Trade Mark | Chemical components |    |       |       |        |       |       |       |       |       |
|----------|------------|---------------------|----|-------|-------|--------|-------|-------|-------|-------|-------|
|          |            | C                   | Si | Mn    | P     | S      | Cu    | Ni    | Mo    | Cr    | V     |
| ASTM A53 | A          | ≤0.25               | /  | ≤0.95 | ≤0.05 | ≤0.045 | ≤0.40 | ≤0.40 | ≤0.15 | ≤0.40 | ≤0.08 |
|          | B          | ≤0.30               | /  | ≤1.2  | ≤0.05 | ≤0.045 | ≤0.40 | ≤0.40 | ≤0.15 | ≤0.40 | ≤0.08 |

A53 Mechanical property

| Tensile Strength (Mpa) | Yield Strength(Mpa) | Elongation(%) |
|------------------------|---------------------|---------------|
| ≥330                   | ≥205                | ≥29.5         |
| ≥415                   | ≥240                | ≥29.5         |

Pipe Fittings



Foam Fire Extinguishing System


Foam Bladder Tank is to provide foam solution for fire foam system. It is mainly consist of pressure tank, bladder, proportioner, control valves, pressure gauge and pipelines. High-pressure water is needed to swap out foam concentrate(stored in bladder in the tank) from the tank as a certain proportion. Foam concentrate then mix with pressurized water and form foam solution. The concentrate is discharged from the tank by incoming water applying pressure to the bladder. This applied energy is transferred to the concentrate,supplying pressurized concentrate to the proportioner. (Proportioners are separate items described on a separate data sheet.) For bladder is separated from the water that it can be utilized next time if not finished.Besides, there is feed inlet to refill or rehang foam concentrate.



Horizontal type



Vertical type

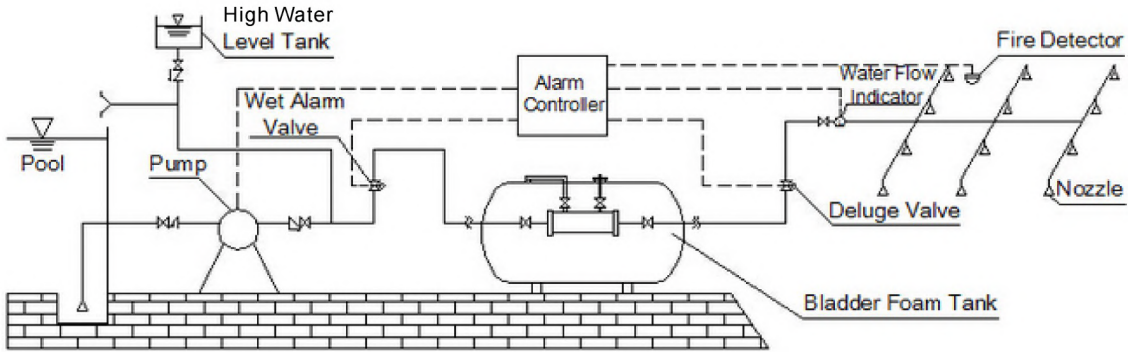

| Features                                                                      |  |
|-------------------------------------------------------------------------------|--|
| Big flow pressure range and small pressure loss                               |  |
| Widely used both in mid-multiples and low multiples foam extinguishing system |  |
| Two types: horizontal and vertical                                            |  |



Foam Monitor



Foam Generator Vertical Type

|                        |           |            |
|------------------------|-----------|------------|
| Working Pressure Range |           | 0.6~1.2MPa |
| Pressure Drop          |           | 0.2MPa     |
| Test Pressure          | Intensity | 1.5MPa     |
|                        | Seal      | 1.32MPa    |
| Tank Capacity          |           | 500~10000L |
| Size of Proportioner   |           | DN80~DN250 |
| Flow Rate              |           | 4~360L/S   |
| Mixing Ratio           |           | 3% or 6%   |



Manual Fire hose reel

Swing Arm Fire hose reel

## Fire hose reel



| Specification                          |
|----------------------------------------|
| Material: Rubber                       |
| Length: 30m                            |
| Size: DN19 (3/4") & DN25 (1")          |
| With valve                             |
| With nozzle                            |
| Swing automatic and manual for options |

## Embedded & Wall-mounted Type Cabinet

Customizable size and design cabinet for options



Fire Hose Reel Cabinet



Fire Hose Reel Cabinet



Fire Hose Cabinet



Extinguisher Cabinet

## Fire Blanket



Fire Blanket Box Package



Fire Blanket Plastic Package

### Fire Blanket Box Package

| Model Number | Fire Blankets Size | Net weight (pcs) | Gross weight (pcs) | Quantity(pcs of box)/Size |
|--------------|--------------------|------------------|--------------------|---------------------------|
| AW-FB101     | 1m*1m              | 0.45kg           | 0.7kg              | 20pcs/52 ×34 ×21cm        |
| AW-FB103     | 1.2m*1.2m          | 0.64kg           | 0.9kg              | 20pcs/52 ×34 ×21cm        |
| AW-FB105     | 1.5m*1.5m          | 1.10kg           | 1.3kg              | 15pcs/52 x34 ×21cm        |
| AW-FB107     | 1.2m*1.8m          | 0.93kg           | 1.35kg             | 15pcs/52 x34×21cm         |
| AW-FB109     | 1.8m*1.8m          | 1.39kg           | 1.8kg              | 10pcs/42 ×34×21cm         |

### Fire Blanket Plastic Package

| Model Number | Fire Blankets Size | Net weight (pcs) | Gross weight (pcs) | Quantity(pcs of box)/Size |
|--------------|--------------------|------------------|--------------------|---------------------------|
| AW-FB102     | 1m*1m              | 0.45kg           | 0.5kg              | 30pcs/42 ×34 ×21cm        |
| AW-FB104     | 1.2m*1.2m          | 0.64kg           | 0.7kg              | 20pcs/42 ×34 ×21cm        |
| AW-FB106     | 1.5m*1.5m          | 0.98kg           | 1.1kg              | 15pcs/42 x34 ×21cm        |
| AW-FB108     | 1.2m*1.8m          | 0.95kg           | 1.05kg             | 15pcs/42 x34×21cm         |
| AW-FB110     | 1.8m*1.8m          | 1.39kg           | 1.45kg             | 10pcs/42 ×34×21cm         |



Hose Rack



Hose Adapter



Right Angle Valve



Hose Nozzle



Hose Coupling



Fire Hose